
Actogram Plotter

User Manual · Web version


Draws an actogram from the peak and trough times of a circadian time series, such as a bioluminescence rhythm recorded with JKtron or Ttron, together with the light/dark schedule of the experiment.

Open the app: https://dxda6216.github.io/actogram_plotter/

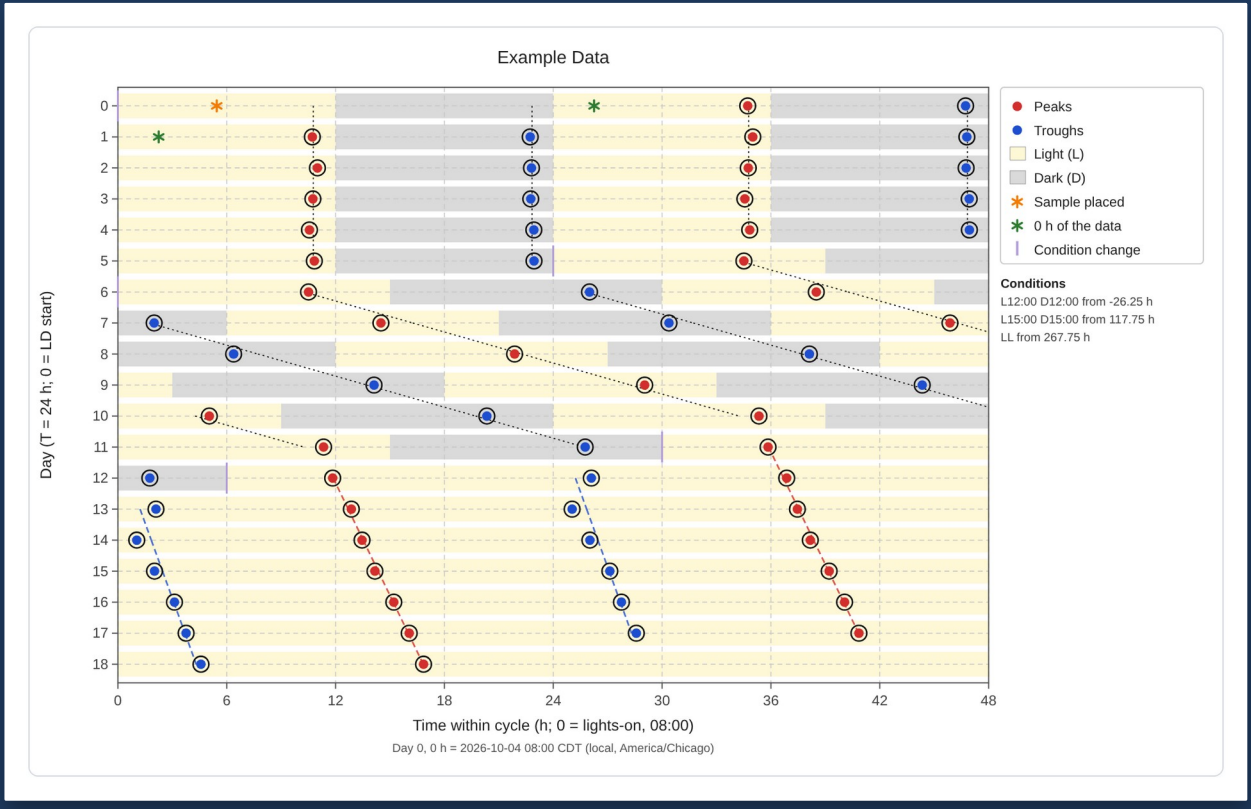

Runs in any current desktop browser · No installation · Your data stays in your browser

Screen overview

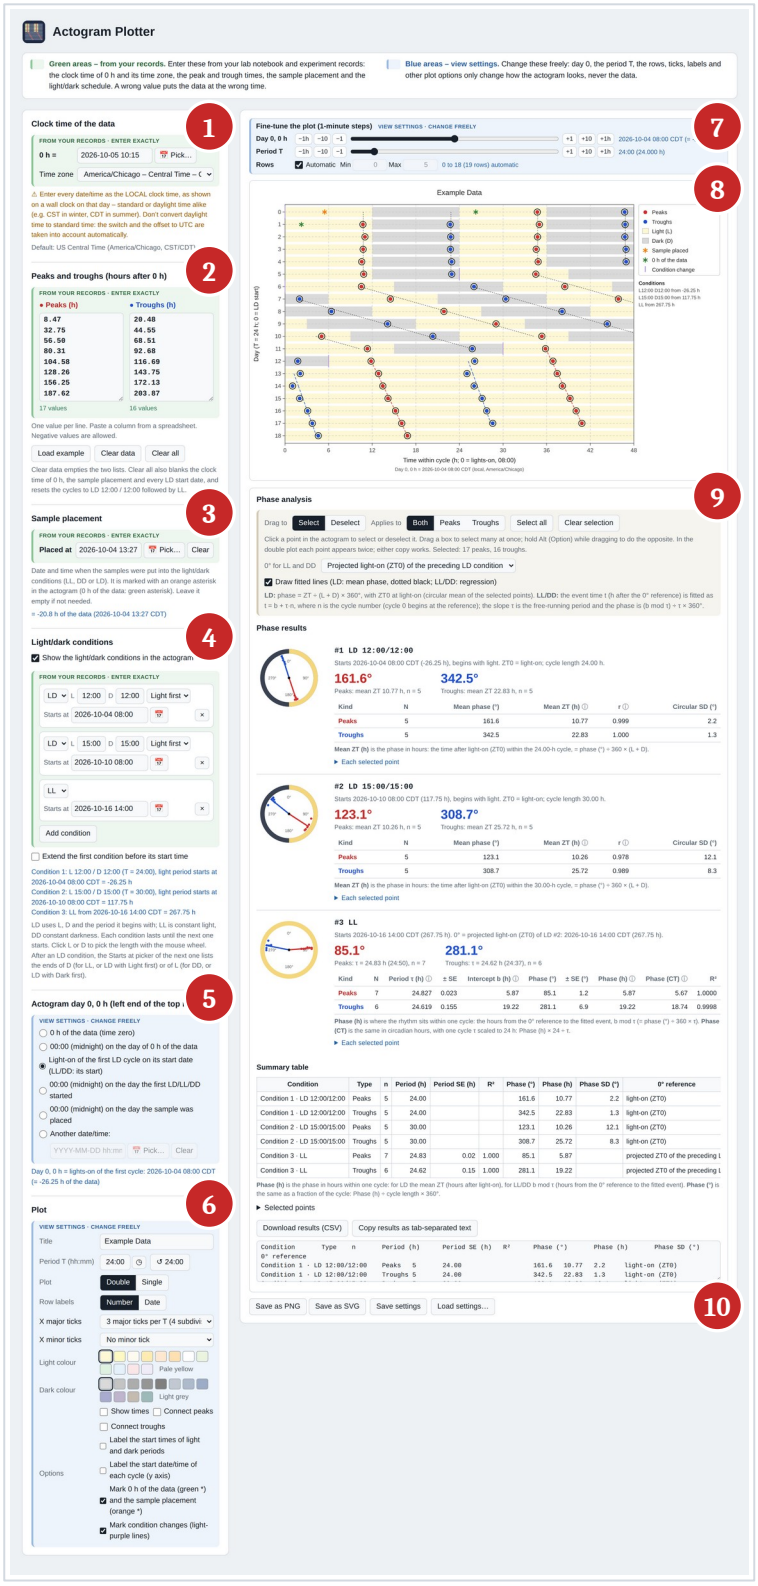

1. **Clock time of the data**
   date and time of 0 h, time zone
2. **Peaks and troughs**
   paste the times; example, clear
3. **Sample placement**
   when the samples went into the conditions
4. **Light/dark conditions**
   one card per LD, LL or DD condition
5. **Actogram day 0, 0 h**
   left end of the top row
6. **Plot**
   period T, ticks, colours, labels, options
7. **Fine-tune the plot**
   day 0, period T and rows in 1-minute steps
8. **Actogram**
   the figure, updated as you type
9. **Phase analysis**
   select points; period and phase results
10. **Save buttons**
    PNG, SVG and settings files

Green and blue areas



The settings column and the fine-tune panel are tinted in two colours. They tell you which values must come from your experiment records and which you can change as you like.

Green – from your records

Enter exactly, from the lab notebook

- Clock time of the data: 0 h and the time zone
- Peaks and troughs (hours after 0 h)
- Sample placement: placed at
- Light/dark conditions: one card each with the condition, L, D, light or dark first and the start date and time

A wrong value puts the data, the lighting or the asterisks at the wrong time. Check these against your records before you save a figure.


Blue – view settings

Change freely

- Actogram day 0, 0 h
- Plot: title, period T, double or single plot, row labels, ticks, band colours and options
- Fine-tune panel: day 0, period T and rows

These only change how the actogram looks; the data and the schedule stay the same. Try different settings as often as you like.

0 h of the data is a recorded value, so it is set only in the left column. **Sand-coloured:** the selection tools and the 0° reference of Phase analysis. They change the analysis, not the data; the results below them are on white.

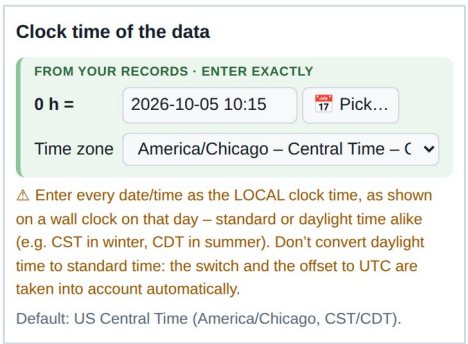

A green area: Clock time of the data



A blue area: the fine-tune panel

» Quick start

Before you start: open the app. It starts with example data (title “Example Data”). Click **Clear all** to start a new experiment. Steps 1–4 (green) come from your records; 5–7 (blue) only change the view; 9 analyses the points.

1 **Set the clock time of 0 h**
Pick the local date and time that corresponds to 0.00 h of your data. Keep the time zone at US Central Time unless the experiment ran elsewhere.

2 **Paste peaks and troughs**
Paste the peak times and the trough times (hours after 0 h) into the two lists, one value per line.

3 **Enter the sample placement**
Pick when the samples were put into the light/dark conditions (optional; shown as an orange asterisk).

4 **Enter the light/dark schedule**
Describe the first condition (LD, LL or DD) and up to five changes, each with its start date and time.

5 **Choose actogram day 0, 0 h**
Usually “lights-on of the first LD cycle”, so the horizontal axis counts hours from lights-on.

6 **Set the plot**
Set period T (24:00 for a 24-h day) and the display options: ticks, labels, title.


7 **Fine-tune if needed**
Above the actogram: shift day 0 or T in 1-minute steps, or choose which rows (cycles) are shown.

8 **Check the actogram**
The figure redraws after every change. Red points are peaks, blue troughs; asterisks mark 0 h and the placement, purple lines the condition changes.

9 **Analyse phases**
Under the actogram: select points and read the phase (and, in LL/DD, the period) of each condition.

10 **Save**
Save the figure as PNG or SVG, and your inputs as a settings file to reload later.

1 Clock time of the data

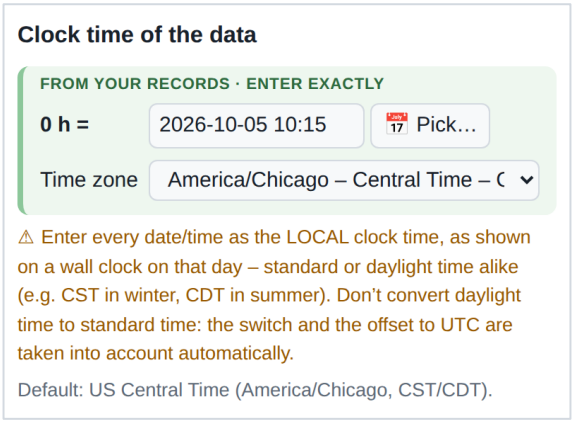

0 h = is the local date and time that corresponds to 0.00 h of your time-series data. Every peak and trough time is counted from this moment.

- **Data that start at 0.00 h** (the usual JKtron/Ttron output): enter the date and time when the measurement began.
- **Data whose first point is not 0.00 h:** subtract the time of the first data point from the date and time it was recorded.


Example. The measurement began on 18 October 2026 at 13:32 (1:32 PM), and the first data point is labelled 3.00 h. Then 0 h = 13:32 − 3:00 = 10:32: click **Pick...** and select **2026-10-18 10:32**.




Time zone. Normally leave it at the default, US Central Time (America/Chicago). Change it only if the clock of the experiment ran in another zone; the list runs from east to west, with UTC last, and "Other…" accepts any zone name or an offset such as UTC+09:00.

Enter local clock times. Type every date and time as the wall clock showed it that day, CST in winter or CDT in summer. Do not convert daylight time: the app converts to UTC itself, so intervals across a daylight-saving change get their true length.

1 Using the date and time picker

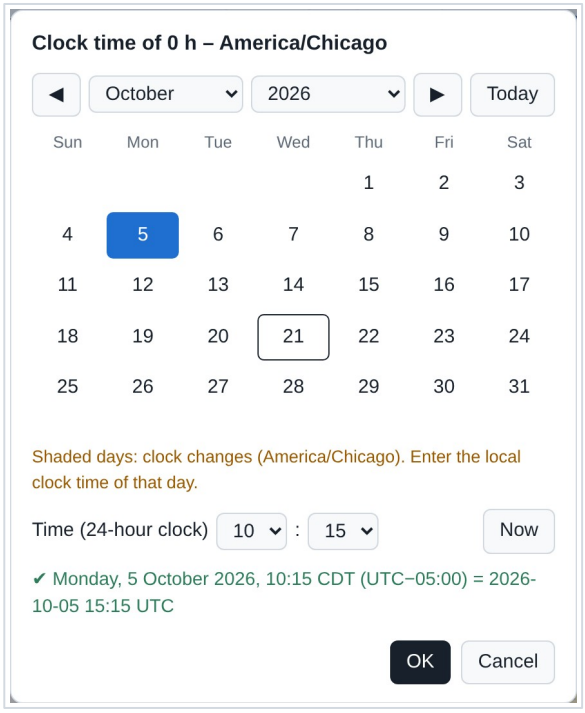


An ordinary day

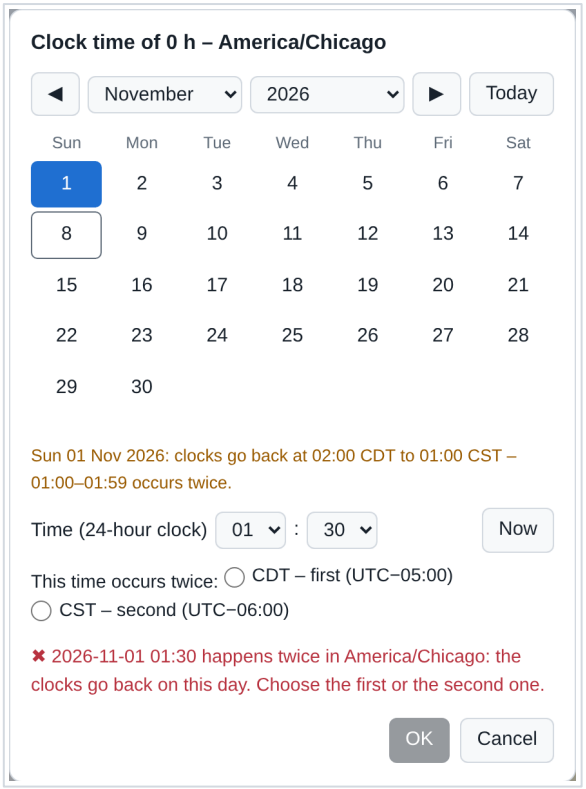

The day the clocks go back (1 Nov 2026)

- **Open:** click the date field or **Pick...** (📅 in the LD table).
- **Date:** choose the month and year from the lists or with the arrow buttons, then click the day. **Today** jumps to today.
- **Time:** choose the hour and minute (24-hour clock); the mouse wheel over a list also changes it. **Now** sets the current date and time.
- **Check:** the green line shows the weekday, the local time with its zone abbreviation, the offset and the time in UTC. **OK** works only when the line is green.
- **Shaded days** are days on which the clocks change. A time in the skipped hour (March) is refused. For a time in the repeated hour (November, 01:00–01:59) choose the first (CDT) or the second (CST) occurrence; it is saved as, for example, “2026-11-01 01:30 CST”.

2 Peaks and troughs

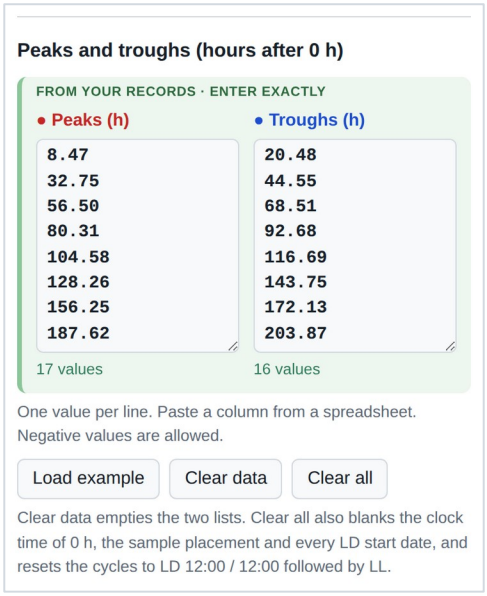


- Paste the **peak times** into the left list and the **trough times** into the right list, one value per line, in hours after 0 h (for example 12.47).
- Copy a column from Excel or from the output of your rhythm-analysis software and paste it with Ctrl+V. Commas, tabs and spaces also separate values. Negative values are plotted before 0 h.
- Under each list the app shows how many values it read (green) or which items are not numbers (red). Remove units or text, and use a decimal point.
- The two lists are independent: they may hold different numbers of values, in any order.
- The app does no rhythm analysis; it plots the times you enter.

Load example replaces the data, the dates and the LD cycles with the example data set. Display options are kept.


Clear data empties both lists (Ctrl+Z in a list brings them back).

Clear all also blanks the clock time of 0 h, the sample placement and every LD start date, and resets the cycles to LD 12:00 / 12:00 followed by LL: the starting point for a new experiment.

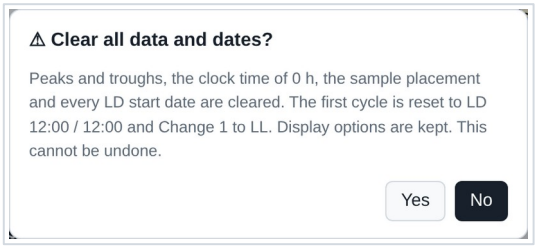


Each button asks first; No is preselected

3 Sample placement

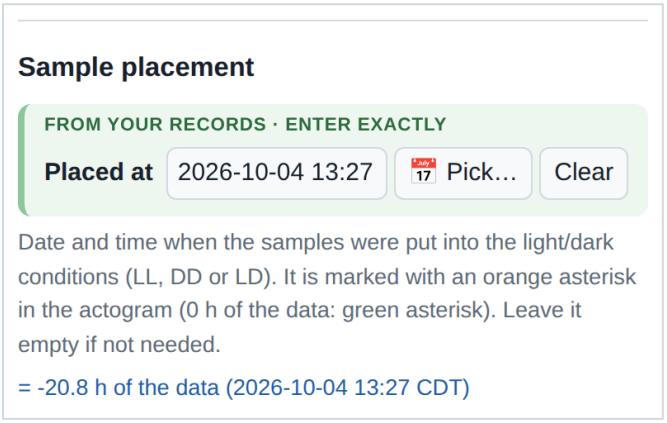


Placed at is the local date and time when the samples were put into the light/dark conditions (LL, DD or LD), for example when the culture dishes were set in the incubator. It is optional: leave it empty if you do not need it, and use **Clear** to empty it.

- The blue line under the field shows the same moment in hours of the data (for the example, −20.8 h: 20.8 hours before 0 h).
- In the actogram it is marked with an **orange asterisk**; 0 h of the data is marked with a **green asterisk**. In a double plot each asterisk also appears one row higher, at x + T.
- With Rows set to Automatic, the row that contains the placement is always shown.
- The placement also sets one of the choices for **Actogram day 0, 0 h**: 00:00 (midnight) on the day the sample was placed.
- Untick **Mark 0 h of the data … and the sample placement** under Plot to hide both asterisks, for example in a figure for publication.

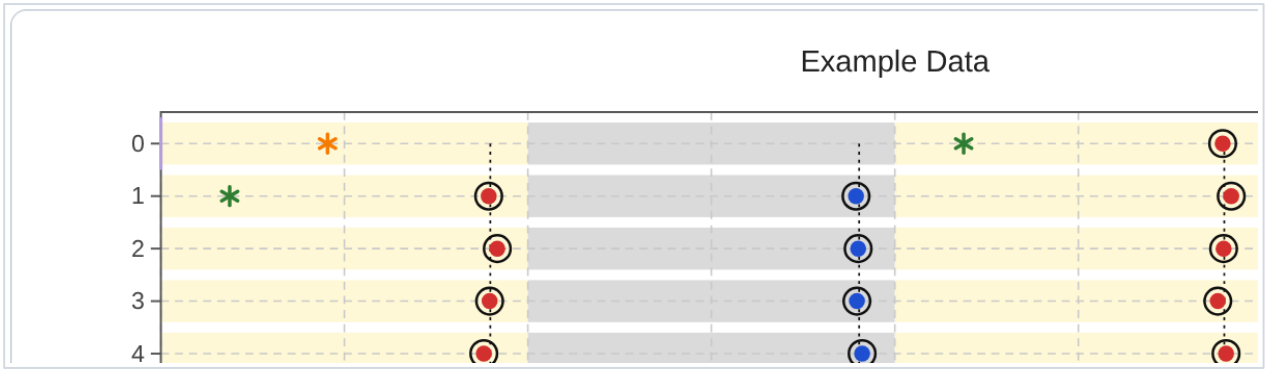

*Example data: orange * = samples placed (4 Oct 13:27), green * = 0 h of the data (5 Oct 10:15)*

4 Light/dark conditions

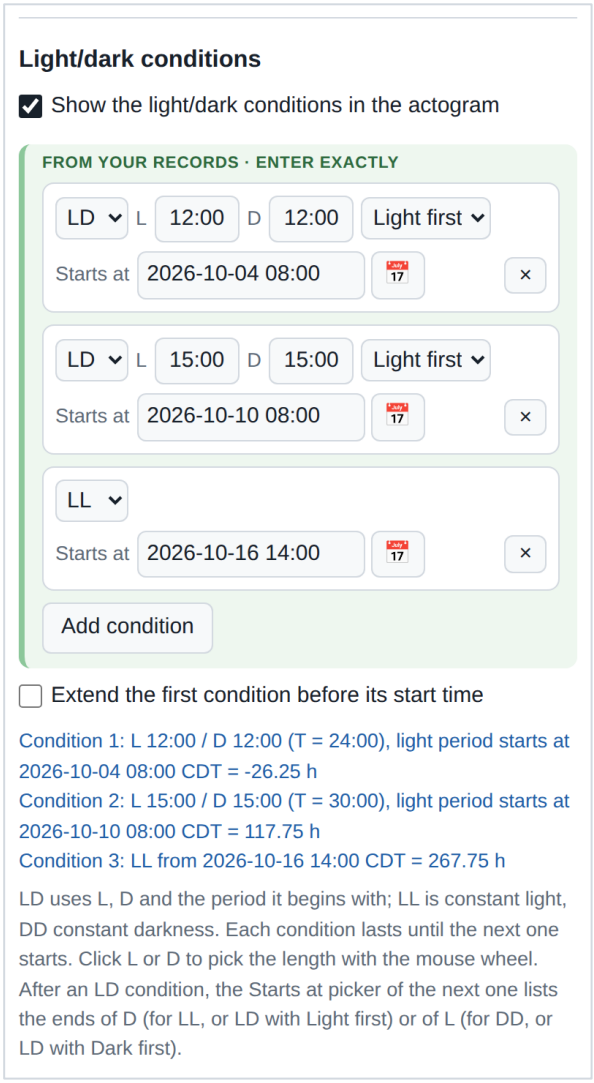


Each condition has its own card. Enter them from your records, in time order.

Item	How to set it
Condition	LD = light/dark cycle, LL = constant light, DD = constant darkness. LL and DD hide L and D.
L, D	Lengths of the light and dark periods, 00:00–99:59 (default 12:00); 15:00 + 15:00 gives T = 30 h. Click the field to pick with the mouse wheel, or type.
Light first / Dark first	Whether an LD cycle starts with its light or its dark period at its start time.
Starts at	Local date and time at which the condition begins (📅 picker).
×	Removes the condition; the later ones move up.
Add condition	Adds a card at the end (up to six conditions). Each lasts until the next one starts.
Show the light/dark conditions	Draws light (pale yellow) and dark (light grey) bands behind the points.
Extend the first condition before its start time	Draws the first condition backwards, e.g. entrainment before recording.

Blue lines under the cards show when each condition starts, in hours of the data; red lines report errors.


4 Lengths and condition changes

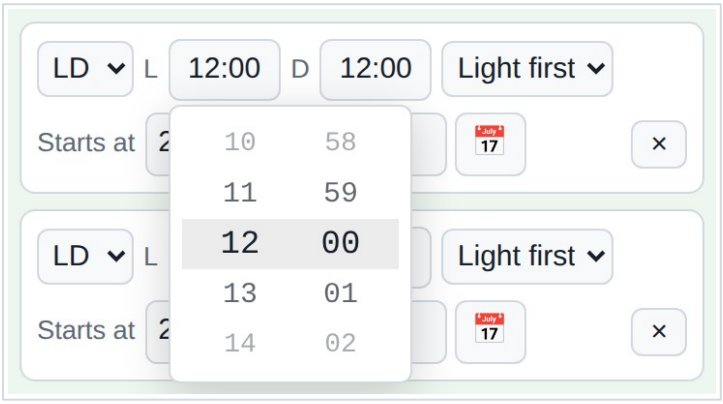

Picking L and D with the mouse. Click the L or D field. Scroll the mouse wheel over the hours or the minutes column, drag a column up or down, or click a number; the value in the grey band is used and the plot follows at once. Arrow keys also work. Press Esc or Enter, or click elsewhere, to close.

Suggested start times. When the condition before a change is LD, the start picker of that change also lists when that LD cycle's D or L ends. Click one to use it, or double-click to use it and close; any other time can still be picked. Set Condition and Begins with first.

New condition	Suggested times
LL	End of D (lights-on)
DD	End of L (lights-off)
LD, Light first	End of D (lights-on)
LD, Dark first	End of L (lights-off)

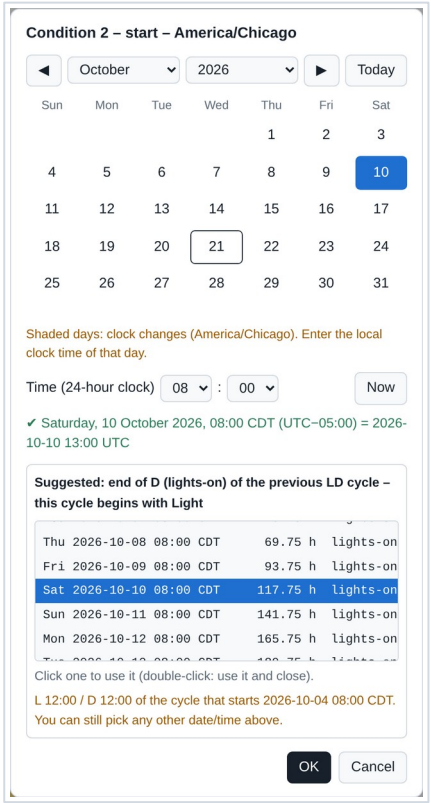


Change 1 (LD beginning with Light)

The schedule of the example data

	Condition	L / D	Starts at
First	LD	12:00 / 12:00	2026-10-04 08:00
Change 1	LD	15:00 / 15:00	2026-10-10 08:00
Change 2	LL	–	2026-10-16 14:00

5 Actogram day 0, 0 h

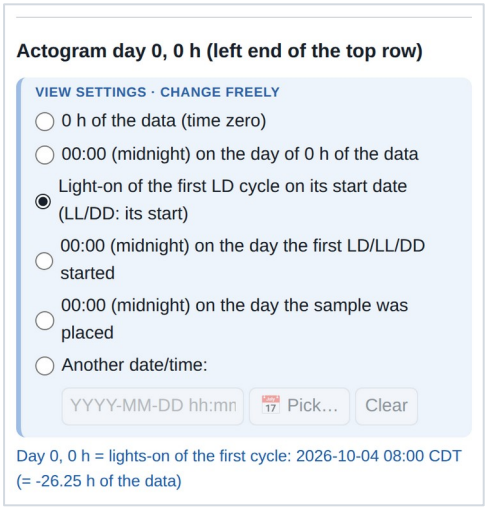

This sets the moment at the **left end of the top row** of the actogram. It is 0 h of the "Time within cycle" axis, and row n starts n × T later. It is a view setting: change it freely.

a **0 h of the data (time zero)**
Rows start at the clock time entered as 0 h.

b **00:00 (midnight) on the day of 0 h of the data**
Rows start at midnight of that day; the axis shows the time of day.

c **Light-on of the first LD cycle on its start date (LL/DD: its start)**
Rows start at lights-on, so the axis counts hours after lights-on (zeitgeber time). Recommended for most experiments.


d **00:00 (midnight) on the day the first LD/LL/DD started**
Rows start at midnight of the day the lighting schedule began.

e **00:00 (midnight) on the day the sample was placed**
Rows start at midnight of the placement day (needs a sample placement time).

f **Another date/time**
Rows start at any date and time you pick. Clear empties the field.


Good to know. The blue line under the options shows the chosen moment in hours of the data. If the chosen reference is missing (LD cycles hidden or with an error, no first start date, or no sample placement time), 0 h of the data is used and a note says so. Shifting day 0 in the fine-tune panel switches this to "Another date/time".

6 Plot settings

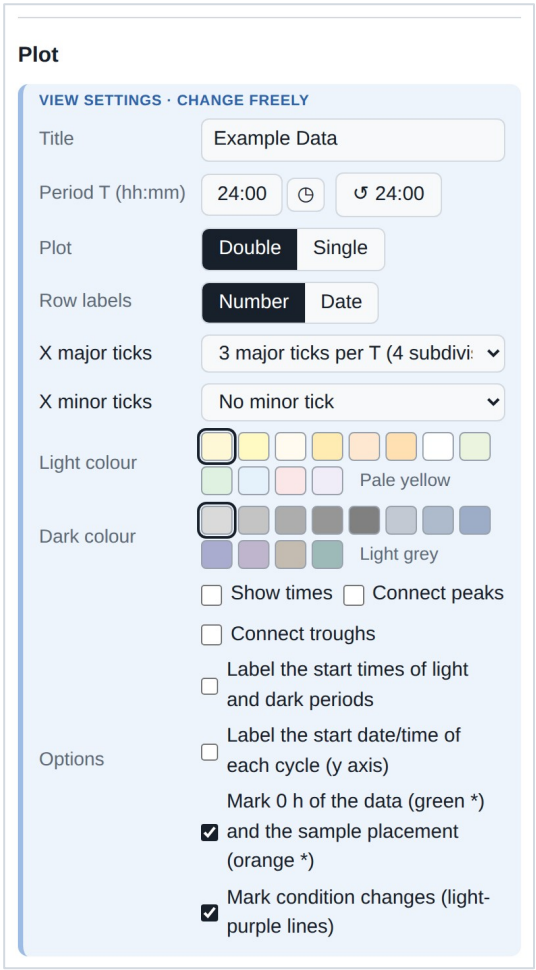

Setting	What it does
Title	Title above the figure (empty: a description of the plot).
Period T	Length of one row, 0:01–240:00 (default 24:00); ◷ wheel, ↺ 24:00 resets it. A double plot spans 0–2T.
Plot	Double (two cycles per row) or single.
Row labels	Row numbers or the date each row starts.
X major / minor ticks	0–5 labelled ticks per T (default 3) and 0–11 unlabelled ticks between them.
Light / Dark colour	12 swatches each (default pale yellow and light grey).
Show times	Writes the time (h) next to each point.
Connect peaks / troughs	Joins each point to the one about one period later.
Label the start times of light and dark periods	Local time and date of each lights-on and lights-off, e.g. “D 04:00 Oct. 6”.
Label the start date/time of each cycle	Each row’s start on the vertical axis.
Mark 0 h … and the sample placement	Green and orange asterisks (on by default).
Mark condition changes	Thin light-purple line where each LD, LL or DD condition starts (on by default).

7 Fine-tuning the plot

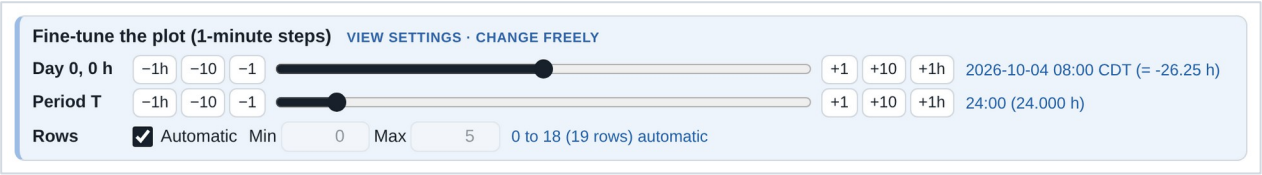


The panel sits above the actogram. Its controls change the view only.

Control	What it does
0 h of the data	Not in this panel: it is a recorded value, set only in the left column (Clock time of the data).
Actogram day 0, 0 h	Moves the left end of the rows. Using it switches day 0 to “Another date/time”.
Period T	Changes T between 0:01 and 240:00.
−1h −10 −1 / +1 +10 +1h	Change the value by 1 h, 10 min or 1 min. Hold a button to repeat.
Sliders	Drag for a live change: up to ±12 h from where you start (day 0), or the full range of T. With a slider focused, each arrow key moves 1 minute.
Rows (cycles)	Automatic shows every row with data. Untick it to set the first (Min) and last (Max) row in whole cycles; negative numbers show cycles before day 0. At most 1000 rows are drawn.


Tip. For a free-running rhythm, drag the Period T slider until the peaks line up vertically: T is then close to the free-running period (about 24:48 for the LL part of the example).

8 Reading the actogram

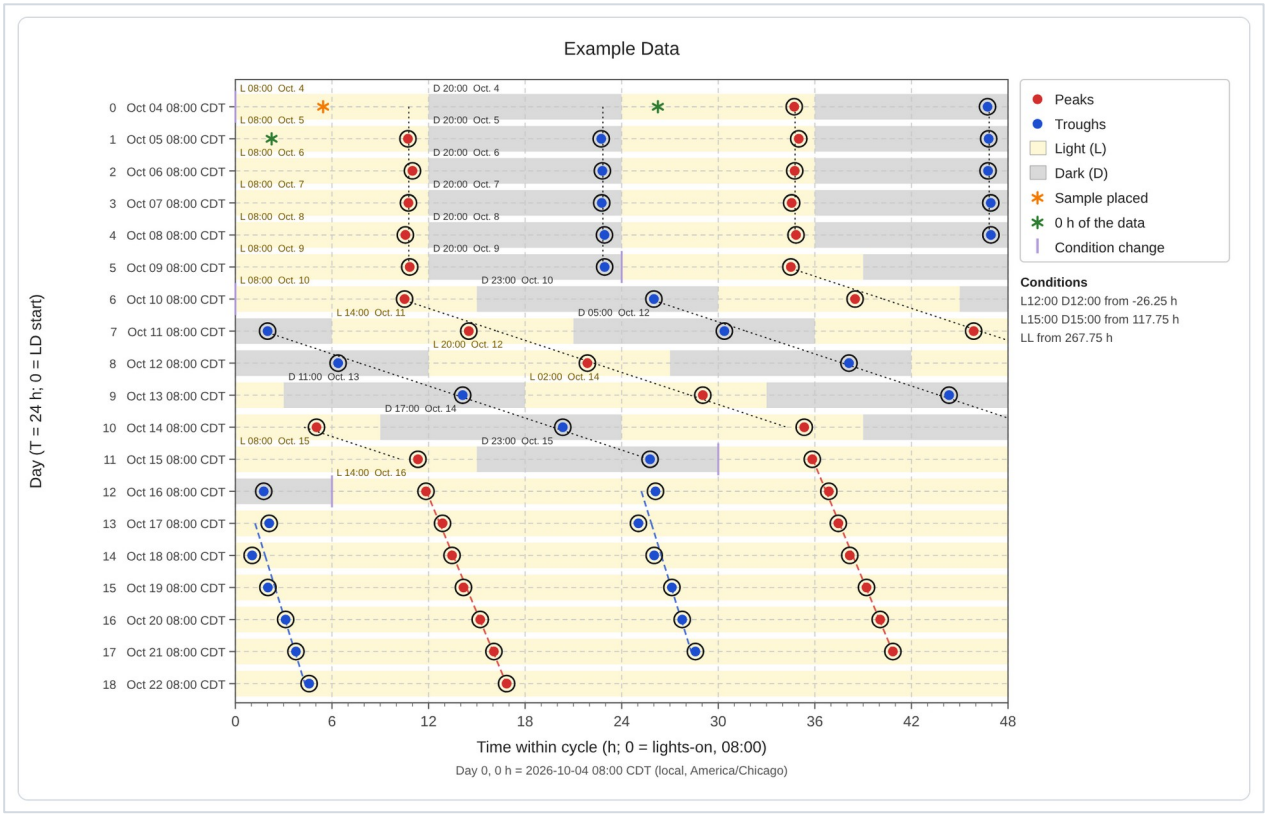


Example data with the start-time labels, the cycle start dates and 5 minor ticks


- **Rows** are successive cycles of length T, from day 0 downwards.
- **Double plot:** each row shows its own cycle and the next one, so every point appears twice (at x and, one row higher, at x + T).
- **Bands:** light and dark periods (pale yellow and grey by default; other colours under Plot).
- **Asterisks:** green = 0 h of the data, orange = sample placement. Light-purple lines: condition changes.
- **Phase analysis:** ringed points are selected; dotted black = LD mean phase, dashed = LL/DD regression.
- **Points:** red = peaks, blue = troughs. A rhythm locked to the cycle forms a vertical line; a free-running rhythm drifts to the right (period longer than T) or to the left (shorter).
- **Right side:** legend and the list of conditions with their start in hours. Under the x axis: the clock time of day 0, 0 h.

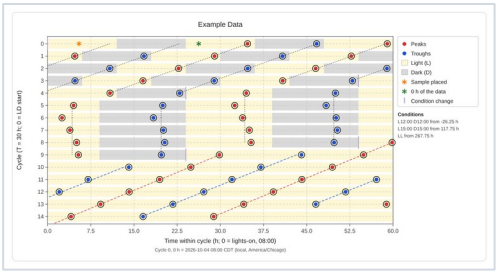

With Period T = 30:00 the LD 15:15 part of the example lines up, and the axis runs 0–60.

9 Phase analysis: selecting points

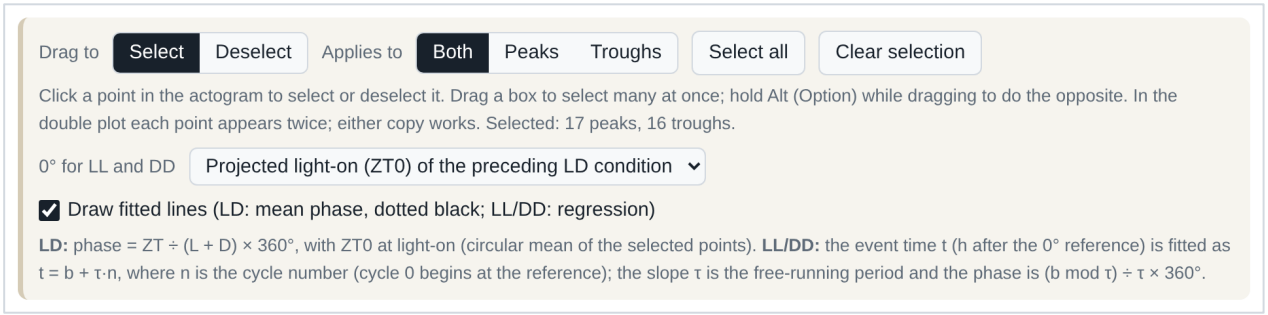


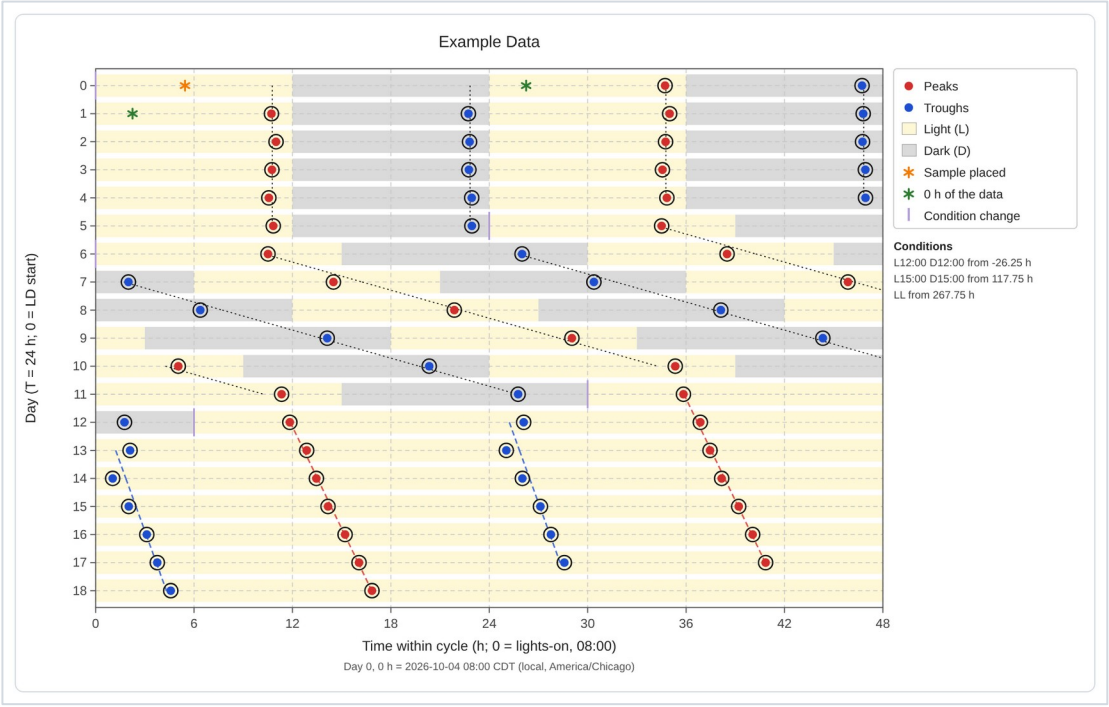

Selected points are ringed; dotted black lines: LD mean phase; dashed: LL regression

- **Click** a point in the actogram to select or deselect it. In the double plot either copy works.
- **Drag a box** to select many points; hold Alt (Option) to deselect instead, or set Drag to to Deselect.
- **Applies to** limits dragging, Select all and Clear selection to peaks, troughs or both.
- **0° for LL and DD:** projected light-on (ZT0) of the preceding LD condition, the start of the condition, 0 h of the data or day 0, 0 h.
- **Draw fitted lines** shows the LD mean phases and the LL/DD regressions in the actogram.
- In the desktop version, switch the toolbar's zoom and pan off before selecting.

9 Phase analysis: results



#1 LD 12:00/12:00

Starts 2026-10-04 08:00 CDT (-26.25 h), begins with light. ZT0 = light-on; cycle length 24.00 h.


161.6° Peaks: mean ZT 10.77 h, n = 5

342.5° Troughs: mean ZT 22.83 h, n = 5

Kind	N	Mean phase (°)	Mean ZT (h) ⓘ	r ⓘ	Circular SD (°)
Peaks	5	161.6	10.77	0.999	2.2
Troughs	5	342.5	22.83	1.000	1.3

Mean ZT (h) is the phase in hours: the time after light-on (ZT0) within the 24.00-h cycle, = phase (°) ÷ 360 × (L + D).

▶ Each selected point



#3 LL

Starts 2026-10-16 14:00 CDT (267.75 h). 0° = projected light-on (ZT0) of LD #2: 2026-10-16 14:00 CDT (267.75 h).

85.1° Peaks: τ = 24.83 h (24:50), n = 7

281.1° Troughs: τ = 24.62 h (24:37), n = 6

Kind	N	Period τ (h) ⓘ	± SE	Intercept b (h) ⓘ	Phase (°)	± SE (°)	Phase (h) ⓘ	Phase (CT) ⓘ	R²
Peaks	7	24.827	0.023	5.87	85.1	1.2	5.87	5.67	1.0000
Troughs	6	24.619	0.155	19.22	281.1	6.9	19.22	18.74	0.9998

Phase (h) is where the rhythm sits within one cycle: the hours from the 0° reference to the fitted event, b mod τ (= phase (°) ÷ 360 × τ). **Phase (CT)** is the same in circadian hours, with one cycle τ scaled to 24 h: Phase (h) × 24 ÷ τ.

▶ Each selected point

One card per condition. The dial has 0° at the top, clockwise; its ring shows light and dark for LD (all light for LL, all dark for DD); the dots are the selected points and the lines from the centre the mean phases.

Value	Meaning
Mean phase (°), Mean ZT (h)	LD: circular mean of the points. ZT = hours after light-on; phase = ZT ÷ (L + D) × 360°.
r, Circular SD (°)	LD: how tightly the points cluster (r = 1: all at one phase) and their circular spread.
Period τ (h) ± SE	LL/DD: slope of the regression t = b + τ·n of the time t (h after 0°) on the cycle number n.
Intercept b (h)	LL/DD: fitted time of cycle 0, in hours after the 0° reference.
Phase (°) ± SE, Phase (h)	LL/DD: b mod τ, as a fraction of the cycle (°) and in hours after the 0° reference.
Phase (CT)	LL/DD: Phase (h) in circadian hours, with τ scaled to 24 h: Phase (h) × 24 ÷ τ.
R^2	LL/DD: how well the straight line fits the points.

9 Phase analysis: summary and export

Condition	Type	n	Period (h)	Period SE (h)	R^2	Phase (°)	Phase (h)	Phase SD (°)	0° reference
Condition 1 · LD 12:00/12:00	Peaks	5	24.00			161.6	10.77	2.2	light-on (ZT0)
Condition 1 · LD 12:00/12:00	Troughs	5	24.00			342.5	22.83	1.3	light-on (ZT0)
Condition 2 · LD 15:00/15:00	Peaks	5	30.00			123.1	10.26	12.1	light-on (ZT0)
Condition 2 · LD 15:00/15:00	Troughs	5	30.00			308.7	25.72	8.3	light-on (ZT0)
Condition 3 · LL	Peaks	7	24.83	0.02	1.000	85.1	5.87		projected ZT0 of the preceding L
Condition 3 · LL	Troughs	6	24.62	0.15	1.000	281.1	19.22		projected ZT0 of the preceding L

- **Summary table:** one row per condition and type, below the cards. Phase (h) is the phase in hours within one cycle (LD: mean ZT; LL/DD: b mod τ).
- **Selected points:** every point with its condition, cycle, ZT or time from 0°, phase and residual.
- **Download results (CSV)** saves both tables for Excel or R; **Copy results as tab-separated text** puts them on the clipboard for pasting into a spreadsheet.
- **Settings files** also keep the selection, so a saved analysis can be reopened.
- **Desktop version:** the same tables are under the actogram; Phase results… opens the cards in a window that can be saved as an image.

How the numbers are calculated


LD. ZT = time after light-on within the L + D cycle; phase = ZT ÷ (L + D) × 360°. The mean phase is the circular mean of the selected points, r the mean resultant length and the circular SD = √(−2 ln r).

LL and DD. Each point gets a cycle number n (cycle 0 begins at the 0° reference; a gap of about one period adds one cycle) and its time t in hours after the reference. A straight line $t = b + \tau \cdot n$ is fitted by least squares: τ is the free-running period, b the intercept, phase = (b mod τ) ÷ τ × 360° and Phase (CT) = (b mod τ) × 24 ÷ τ. The ± SE of the phase comes from the standard error of b.

Tip. Select only clear, well-defined peaks or troughs, and check the R^2 and SE of each LL/DD fit before reporting a period.

What is a phase?

Your samples have a rhythm: it goes up and down, again and again, like the hands of a clock going round and round. A **phase** simply tells you **where in the round** something happens, for example where the peak is.

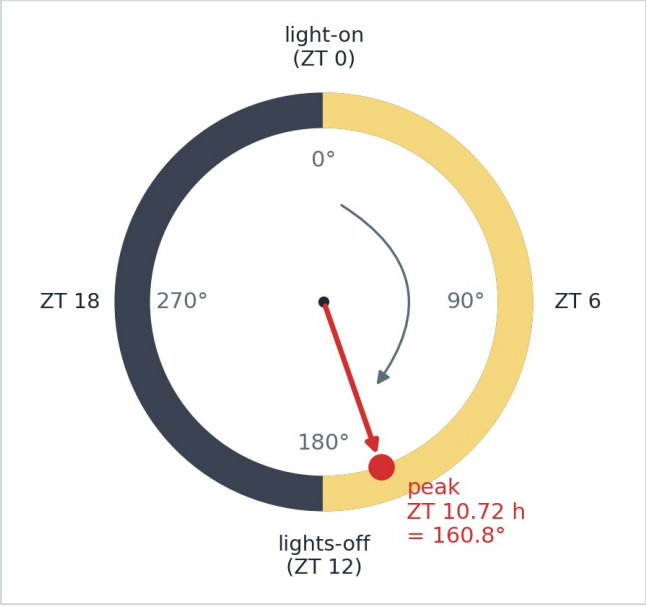

- Think of one whole cycle as a **clock face**. In LD the top of the clock is the moment the lights go on (ZT 0).
- Going once all the way round is **one cycle**: 24 h in LD 12:12, 30 h in LD 15:15.
- **Degrees** just say how far round: a quarter = 90°, half = 180°, three quarters = 270°, all the way = 360° (back at the top).
- So hours turn into degrees like this:

degrees = hours ÷ cycle length × 360


Example. In the example data the first peak comes 10.72 hours after the lights went on. 10.72 ÷ 24 × 360 = 160.8°: a little less than half way round the clock, so the peak is near the end of the light period.

Two words you will meet

- **ZT (zeitgeber time):** hours after the lights went on, in an LD condition. ZT 0 = light-on.
- **CT (circadian time):** the same idea in LL or DD, where there is no light-on to follow. One of the rhythm's own cycles is counted as 24 "circadian hours", however long it really is.
- **mod:** "take away whole cycles and keep what is left". 30 h mod 24 h = 6 h, just like 30 o'clock is 6 o'clock the next day.

Φ LD: the average phase

Why can't we just add up and divide? Because the clock goes round. A peak at ZT 23 (just before light-on) and one at ZT 1 (just after) are really close: only 2 hours apart, across the top. A normal average says ZT 12, the opposite side of the clock! So the app averages **arrows** instead of numbers.

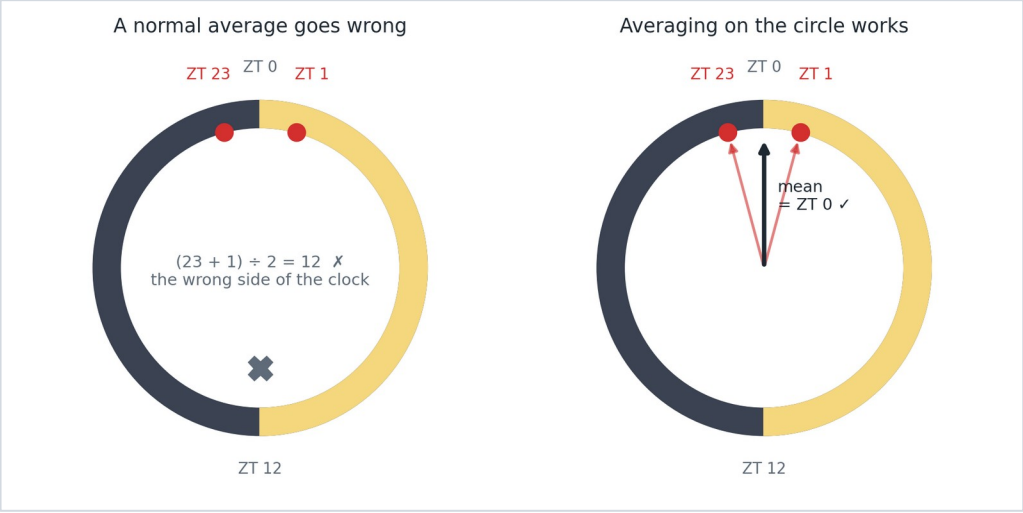

How the app does it, step by step

1. **Find each point's ZT.**
   ZT = (time of the point − time of light-on), then take away whole cycles (mod L + D). Example: a peak 34.72 h after a light-on in LD 12:12 has ZT 34.72 mod 24 = 10.72 h.


2. **Turn the ZT into an angle.**
   angle = ZT ÷ (L + D) × 360°.

3. **Draw an arrow for each point.**
   Every arrow starts at the centre of the clock, has length 1 and points at the angle of its point.

4. **Add the arrows and divide by how many there are.**
   Put them end to end (add their x parts and their y parts) and divide by N. This gives one "average arrow".

5. **Read the answer.**
   The direction of the average arrow is the Mean phase (°). Its length is r (next page). Mean ZT (h) = Mean phase ÷ 360 × (L + D).

LD: do the points agree?

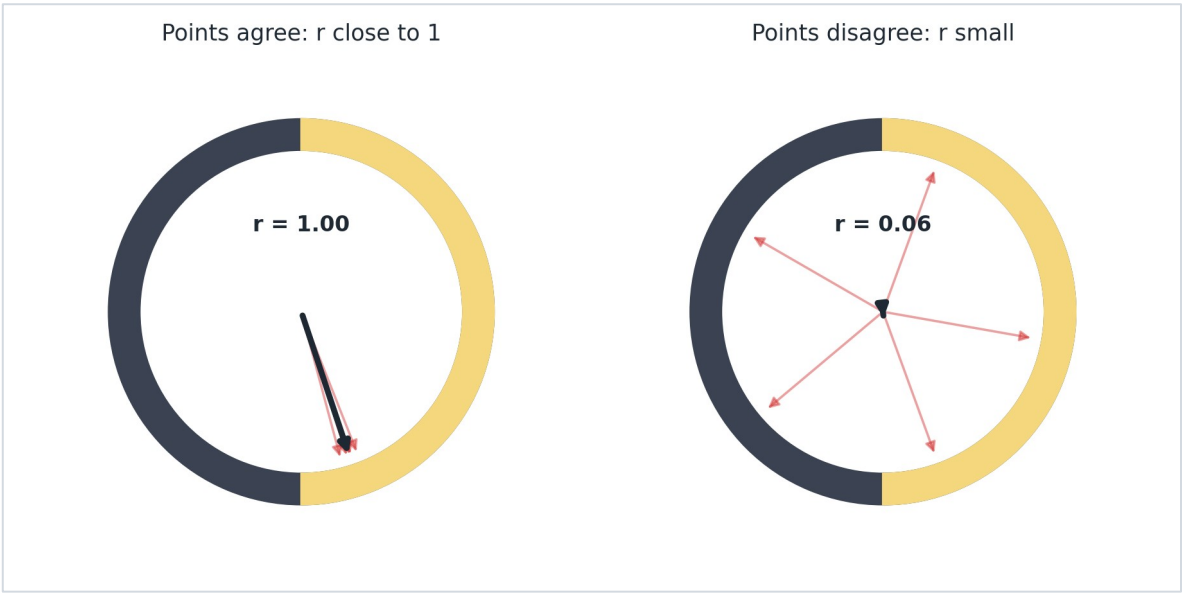

- **r (mean resultant length)** is the length of the average arrow, from 0 to 1. When all the arrows point the same way they add up to a long arrow: r is close to 1 (the points agree). When they point every which way they cancel out: r is close to 0.
- **Circular SD (°)** turns r into a spread in degrees: SD = √(−2 ln r), in degrees. Small = the points are tightly together; it behaves like an ordinary standard deviation when the points are close.


Worked example: the peaks of condition #1 (LD 12:12, light-on 08:00)

Peak	Time (h after 0 h)	Time after light-on (h)	ZT (h) = … mod 24	Angle (°) = ZT ÷ 24 × 360
1	8.47	34.72	10.72	160.8
2	32.75	59.00	11.00	165.0
3	56.50	82.75	10.75	161.3
4	80.31	106.56	10.56	158.4
5	104.58	130.83	10.83	162.4

Result. Average of the five arrows: Mean phase = 161.6°, so Mean ZT = 161.6 ÷ 360 × 24 = 10.77 h. r = 0.999 (almost 1: the five peaks agree very well) and Circular SD = 2.2°.

LL and DD: a straight line

In constant light (LL) or constant darkness (DD) there is no light-on to measure from, and the rhythm's own clock runs a little fast or slow, so every cycle the peak comes a bit earlier or later. Write down, for each cycle, how many hours after a starting point (the **0° reference**) the peak happened. The numbers go up by about the same amount each time, like stairs that all have the same height. A straight line through them tells us two things:

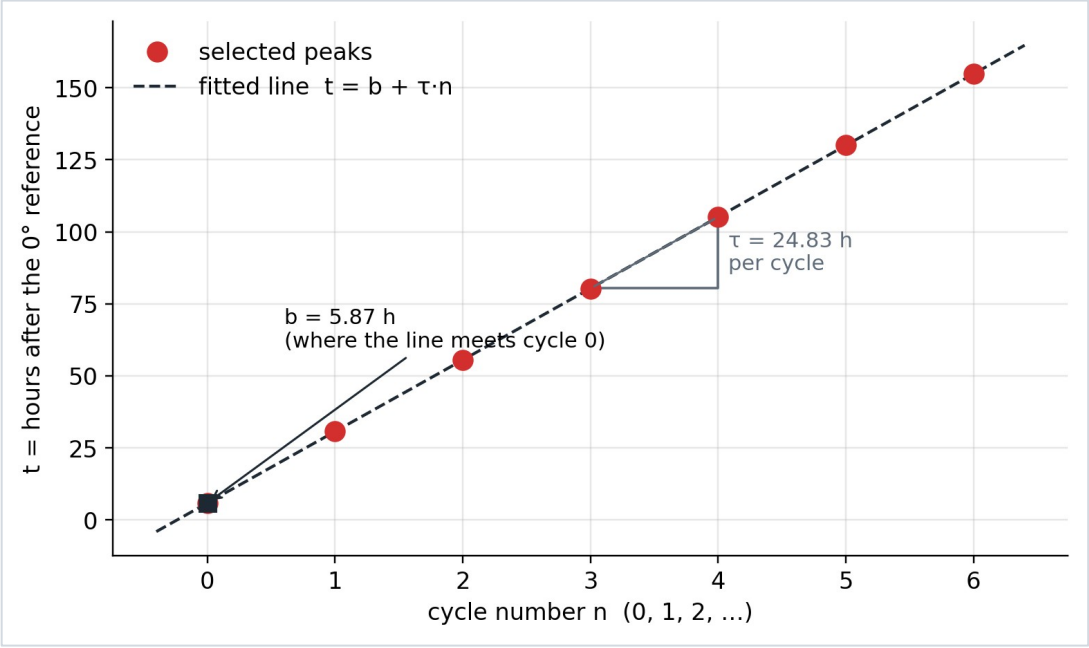

- **the slope τ (tau)** = the height of each stair = how many hours one cycle takes: the free-running **period**.
- **the intercept b** = where the line is at cycle 0 = when the peak "would be" in the first cycle after the reference.

How the app does it, step by step

1. **Choose the 0° reference R.** e.g. the projected light-on (ZT0) of the LD before. t = time − R for every point.

2. **Number the cycles n.** The first point gets n = floor((t of the first point) ÷ the previous LD period); each next point gets one more, or more if a cycle was skipped.

3. **Fit the straight line t = b + τ·n.** by least squares: of all straight lines, the one whose squared up-and-down distances to the points add up to the smallest number.

LL and DD: from the line to the phase

Worked example: the peaks of condition #3 (LL), 0° = 16 Oct 14:00 (267.75 h)

Cycle n	Time (h)	t = time − 267.75	On the line: b + τ·n	Residual (h)
0	273.59	5.84	5.87	-0.03
1	298.62	30.87	30.70	+0.17
2	323.21	55.46	55.52	-0.06
3	347.92	80.17	80.35	-0.18
4	372.96	105.21	105.18	+0.03
5	397.81	130.06	130.01	+0.05
6	422.60	154.85	154.83	+0.02


Period τ: 24.827 h: each cycle takes about 24.83 hours (0.83 h longer than a day).

Intercept b: 5.87 h: on the line, the peak of cycle 0 comes 5.87 h after the 0° reference.

Phase (h) = b mod τ: 5.87 mod 24.83 = 5.87 h. If b were bigger than one cycle (for example 55.52 h), whole cycles would be taken away first, as in the ruler below.

Phase (°) = Phase (h) ÷ τ × 360: 5.87 ÷ 24.83 × 360 = 85.1°: about a quarter of the way round.

Phase (CT) = Phase (h) × 24 ÷ τ: 5.87 × 24 ÷ 24.83 = 5.67 circadian hours: the same place in the cycle, as if the cycle were stretched or squeezed to exactly 24 h.

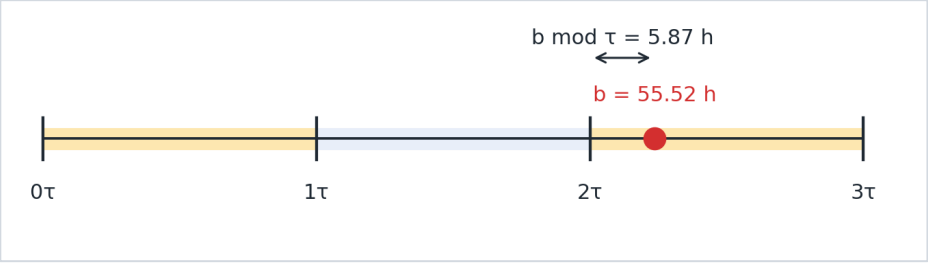

- **± SE (standard error):** how sure we are. τ = 24.83 ± 0.023 h; the phase ± SE comes from the SE of b (0.082 h): 0.082 ÷ 24.83 × 360 = 1.2°. Repeating the experiment would usually give a value within about ± 2 SE.
- **R^2:** how straight the points are, from 0 to 1. 1 = all exactly on the line. Here R^2 = 1.0000.
- **Residual:** how far a point is above (+) or below (−) the line, in hours.

Every result, explained (1): the cards

Item	What it means	In simple words
Kind	Peaks or troughs of the condition.	Which points the row is about.
N	Number of selected points.	How many points were used.
Big red / blue number	Phase (°) of the peaks / troughs.	Where round the clock they are.
Mean phase (°) (LD)	Circular mean of the points' angles; 0° = light-on.	Direction of the average arrow.
Mean ZT (h) (LD)	Mean phase ÷ 360 × (L + D).	Hours after the lights go on.
r (LD)	Mean resultant length, 0–1.	How much the points agree (1 = perfectly).
Circular SD (°) (LD)	√(−2 ln r), in degrees.	How spread out the points are.
Period τ (h) (LL/DD)	Slope of t = b + τ·n.	How long one cycle of the rhythm takes.
± SE (after τ)	Standard error of the slope.	How sure we are about τ.
Intercept b (h) (LL/DD)	Value of the line at cycle 0, h after the 0° reference.	Where the line starts.
Phase (°) (LL/DD)	(b mod τ) ÷ τ × 360.	Where round the cycle, from 0°.
± SE (°)	SE of b ÷ τ × 360.	How sure we are about the phase.
Phase (h) (LL/DD)	b mod τ.	The phase in hours after 0°.
Phase (CT) (LL/DD)	Phase (h) × 24 ÷ τ.	The phase on a 24-hour "rhythm clock".
R^2 (LL/DD)	1 − (squared distances to the line) ÷ (squared distances to the mean).	How straight the points are.
0° = …	The 0° reference of LL/DD (see the Phase analysis settings).	Where the counting starts.
Dial	Ring: light (yellow) and dark; dots: points; line: mean phase (LD length = r).	A picture of all of the above.

Every result, explained (2): the tables

Summary table


Column	What it means
Condition, Type, n	The condition (#, LD/LL/DD), peaks or troughs, and the number of points.
Period (h)	LD: the cycle length L + D. LL/DD: τ, the fitted period.
Period SE (h), R^2	LL/DD only: standard error of τ and how straight the points are.
Phase (°), Phase (h)	The phase as an angle and in hours within one cycle (LD: mean ZT; LL/DD: b mod τ).
Phase SD (°)	LD only: circular SD of the points.
0° reference	LD: light-on (ZT0). LL/DD: the chosen reference.

Selected points (“Each selected point”)

Column	What it means
Type, Time (h)	Peak or trough, and its time in hours after 0 h of the data.
Local date/time	The same moment on the wall clock (time zone of the data).
Condition	The condition the point falls in.
Cycle	LD: which cycle after the condition’s first light-on. LL/DD: the cycle number n used in the fit.
ZT or t from 0° (h)	LD: ZT. LL/DD: t, hours after the 0° reference.
Phase (°)	The point’s own phase: LD from its ZT; LL/DD from t mod τ.
Residual (h)	LL/DD: how far the point is above (+) or below (−) the fitted line.

Remember. All results use only the points you selected. If a number looks odd, check the selection first: a missing or extra point can move a mean or tilt a line.

10 Saving your work



PNG Save as PNG

A picture at three times the screen resolution, for slides, documents and posters. The file is named after the title.

SVG Save as SVG

A vector drawing that can be edited in Illustrator, Inkscape or PowerPoint (ungroup it after inserting).

{ } Save settings

All inputs and options in one JSON file: data, clock time, time zone, LD cycles and plot settings.

↑ Load settings...

Reopens a settings file. Files from the desktop version (Actogram_Plotter_app.py) open too, and vice versa.

What the browser remembers. The page keeps your display options in this browser between visits. Each visit starts again with the example data, period T = 24:00 and US Central Time, so use **Save settings** to keep your own data.

Privacy. Everything you enter stays in your browser. No data is uploaded or sent anywhere.

Troubleshooting

Message or problem	Cause and what to do
"… does not exist in America/Chicago (the clocks jump forward then)"	The time falls in the hour skipped when daylight time starts (March). Pick another time.
"… happens twice … Choose the first or the second one"	The time falls in the hour repeated when daylight time ends (November). Choose CDT (first) or CST (second).
"Clock time of 0 h: pick a date and time."	The clock time of 0 h is empty (for example after Clear all). Pick it with Pick….
"Select peaks or troughs in the actogram …"	No points are selected for Phase analysis. Click points or drag a box over them.
"needs at least 2 points" / "all points in one cycle"	An LL/DD fit needs points in at least two cycles. Select more points of that condition.
No asterisks	Tick "Mark 0 h of the data … and the sample placement" under Plot; the orange one also needs a sample placement time.
"Not a number: …" under a list	The list contains text, units or a decimal comma. Keep only numbers, with a decimal point.
"L and D must be between 00:00 and 99:59 …"	An LD cycle has an invalid length, or L + D = 0. Correct L or D.
"… its start must be later than the start of the previous cycle"	The changes are not in time order. Correct the start dates and times.
"Period T must be between 0:01 and 240:00"	Enter T as hh:mm within that range.
No light/dark bands	Tick "Show the LD cycles", and fix any red message under the LD table.
Note: "The LD cycles are not valid yet, so 0 h of the data is used"	Day 0 is set to lights-on but the LD cycles have an error. Fix them, or choose another day 0 option.
Some points are missing	They lie outside the rows shown. Tick Rows → Automatic, or widen Min / Max (negative values are allowed).
"Only the first 1000 rows are drawn"	Period T is very short compared with the data. Use a longer T.
"Saving isn't available in this view"	Open the app from its web address (dxda6216.github.io/actogram_plotter) and save from there.